


SOLENOID USED TO CONTROL THE DISPATCH OF COMPONENTS

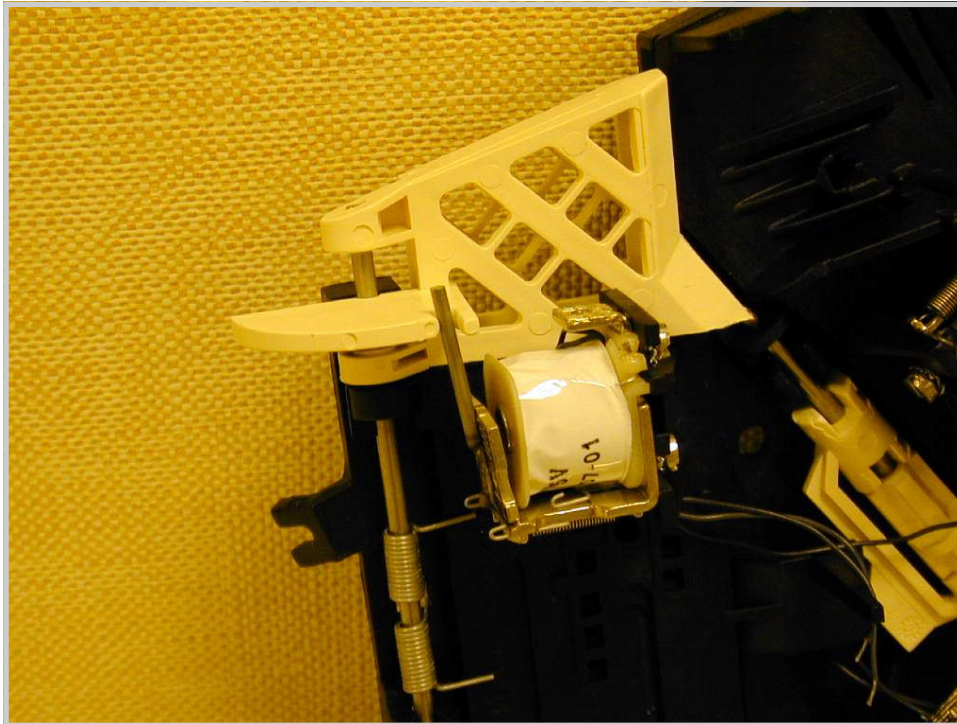

Solenoid used : 7613

SIZE	POWER SUPPLY	WEIGHT (g.)	STROKE (mm)	Maximum force (kg)
18.5 x 25.5 x 20	6 to 220 VDC – 230 VAC	40	2	0.200

Principle :

A hollow shutter permits the blocking or the dispatch of components

