


SOLENOID USED TO CONTROL THE PASSIVE SECURITY OF A DOOR'S LOCK

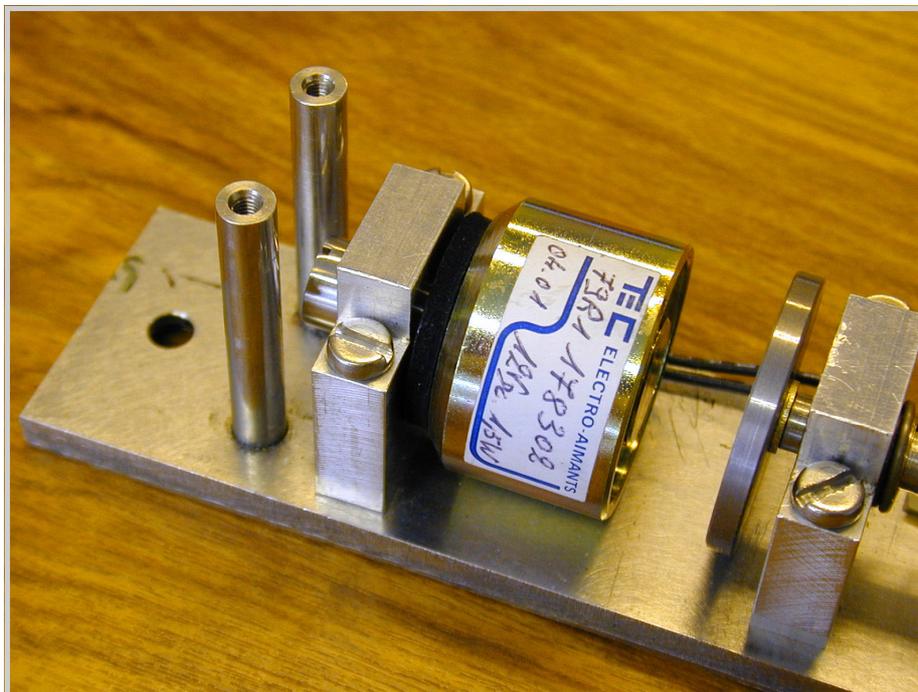

Solenoid used : **79R1**

SIZE	STANDARD VOLTAGE	NOMINAL POWER AT 20°	HOLD FORCE (daN)
Ø 30 x 20	24 – 48 VDC	1.5 W	≥ 12

Principle :

In case of power cut-off, the plate switches off and the position of the lock is modified

