


ELECTRO-AIMANTS ET VENTOUSES

Linear monostable solenoids with magnetic locking by permanent magnet

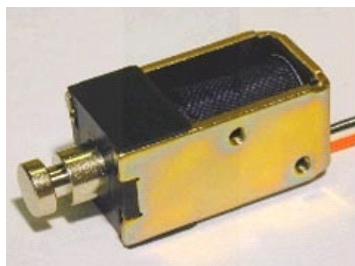

TEC

7B07X

Weight : 34 g.

Power supply : 6 to 24 VDC

Others models

- ▶ 7B07X
- 7B08T
- 7B10T

▶ Description


LINEAR MONOSTABLE SOLENOID WITH MAGNETIC LOCKING BY PERMANENT MAGNET

POWER REQUIREMENTS : Direct current : 20 W

HOLD FORCE thanks to the permanent magnet : 0,48 daN with power supply at nominal voltage.
: Direct current : 20 W : 0,48 daN with power supply at nominal voltage.

▶ Performances

• DIRECT CURRENT

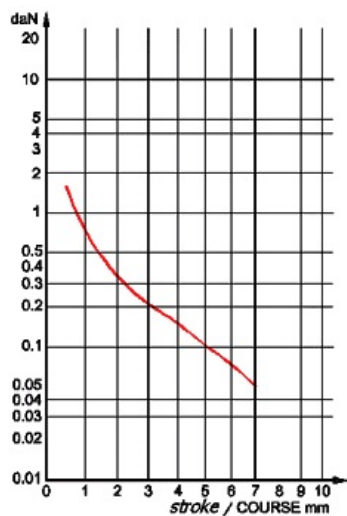


— duty cycle intermittent service nominal voltage cold coil


▶ Dimensions

• DIRECT CURRENT

7B07X - front view

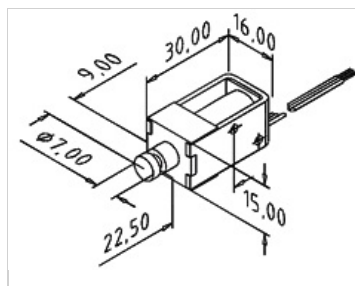

7B07X - back view

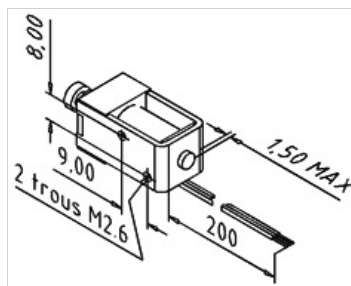

▶ Technical features

HomeConnection	On wires length 200 mm
-----------------------	------------------------

Non-contractual document - characteristics to be confirmed before order
TEC AUTOMATISMES reserves the right to modify description and specifications without notice