

RELAIS INSTANTANÉS ET DE FONCTION

2 contacts



Otros modelos

- ▶ 2329
- 2361
- 2381
- 2382
- 2481

TEC

2329

- rear wiring socket with clips 9246
- rear wiring socket with clips 9243
- rear wiring socket / PCB mounting 9244
- front wiring socket with clips 9946-20
- front wiring socket / screw terminals 9946-10


▶ Description

Relay for line control - 3 output relays with 250 VAC/5 A CO contacts.

Pluggable on the following sockets : 9244, 9246, 9243 & 9946.

Detailed table of the coil resistance data is available in the technical support pages of this site or can be sent upon request.

▶ Encombrement

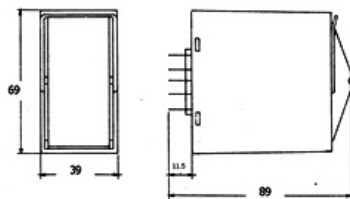

▶ Principe de fonctionnement

Control the condition of the line between the control circuit (dry contact type) and the control device.

2329 relay acts as an interface


The three output CO contacts give:

- * 1 default for the line in short-circuit (with visualisation by LED)
- * 1 default for the open line (with visualisation by LED)
- * 1 line contact putting off.

The relay used for default type indication and contact position checks permanently the line impedance between terminals n° 1 and 6..

The line impedance to control must be less than 3000 Ohms.

▶ Schéma de principe

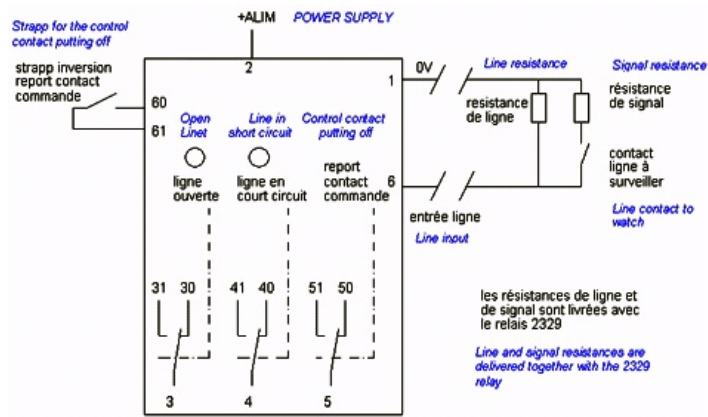

► Caractéristiques

Fonction	line control
Présentation	under cover
Raccordement	on front or rear wiring socket
Température de fonctionnement	- 10 to + 55°C
Température de stockage	- 20 to + 70°C
Masa	130 g

► Bobine

	Courant continu	Courant alternatif
Tension nominale mini.	24 V	24 V
Tension nominale maxi.	220 V	220/230 V
Domaine d'action	-15 à 10% of nominal voltage	

► Contactos

Número de contactos	2
Courant permanent maxi. admissible	5 A per contact

► Versions

For any complementary information regarding mounting and withdrawal, please refer to the technical support pages of this site or contact us.

Document non-contractuel - Caractéristiques à se faire confirmer avant commande
Tec automatismes se réserve le droit de modifier les descriptions et spécifications sans
préavis